




BARNES™
MOLDING SOLUTIONS

HOT RUNNER TECHNOLOGY

09SVP-03 Single Axis Valve Gate Nozzles Pneumatic


Product Catalog

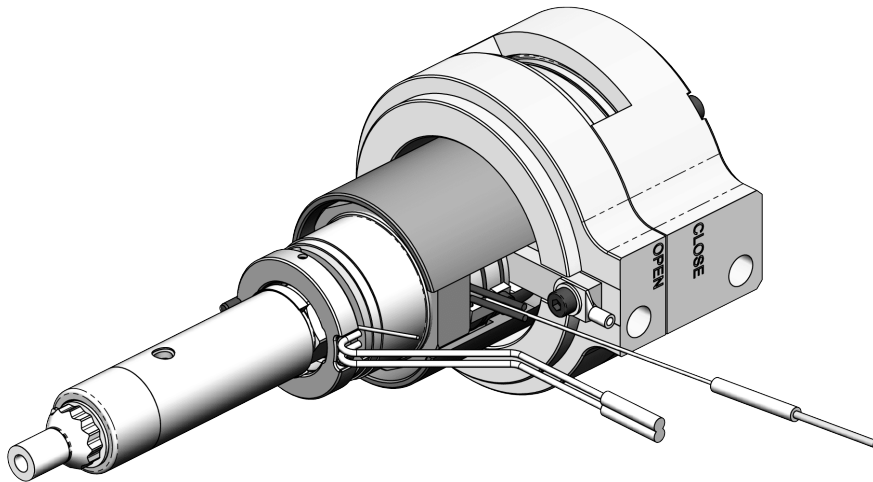

Doc009116_RIS.png



Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

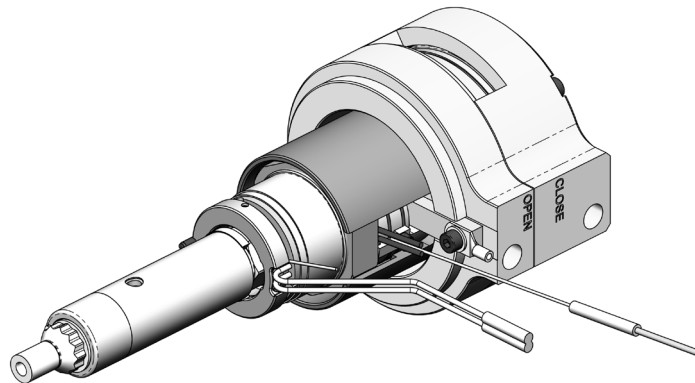

Doc009116_RIS_01.png


Valve Pin Operation	
Operation medium	pneumatic
Pressure range	5 - 10 bar (72.5 - 145 psi)
Flowrate	1.2 l/min / 5 bar (72.5 psi)
Reaction time	~1,2 s
Valve pin stroke:	8 mm
Adjustment	± 1.5 mm Via adjustment threads from outside.
Closing force	792 N / 6 bar (87 psi)
Opening force	792 N / 6 bar (87 psi)
Connection	M10x1 (8-L)
Valve pin	
Valve pin diameter	Ø 3,8 mm
Attachment	Quick coupling, anti-rotation
Cooling	Without being directly cooled the single axis valve gate nozzles 09SVP-03 can be used up to a mold temperature of 80 °C (176 °F).
Heating Power	
externally heated, 230 V AC	The numbering of the heating zones starts at the nozzle tip and ends at the nozzle head.
Zone 1 (From a nozzle length of 50-<170 mm)	150 - 260 Watt
Zone 2 (From a nozzle length of 170-390 mm)	130-360 Watt
Head	450 plus 500 Watt
Thermocouple	
EN 60584 Fe-CuNi 0 = Typ J; NiCr-Ni = Typ K	
The heater & thermocouple are replaceable.	
Application	
For all usual thermoplastics Max. shot weight per nozzle (g): → 80 (low viscosity)	

NOTICE

To ensure long life and continued flawless operation of the actuator, we recommend using filtered compressed air.



Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

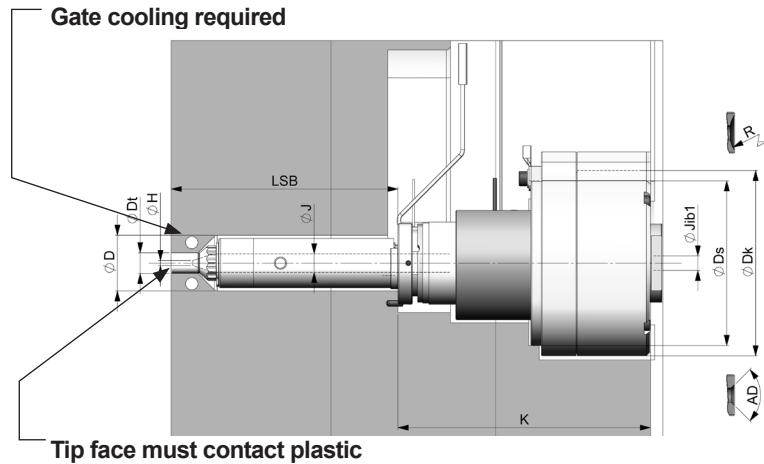

Doc009117_RIS.png

J	Flow bore	Ø 09 ¹⁾	H	Gate orifice	see page 7
Jib1	Flow bore inlet bushing	Ø 7	K	Head height	122,5
LSB	Nozzle length	50...400 ²⁾	Dk	Head diameter	Ø 90
F	Tip extension	see page 7	Ds	Diameter of head centering	Ø 80
D	Cutout	Ø 27	R	Nozzle contact radius	0...40
Dt	Tip Ø	see page 7	AD	Nozzle contact angle	90°...120°

¹⁾ Standard flow bore value = Ø 9

consult Synventive for custom dimensions Ø 7, Ø 8, Ø 10

²⁾ Standard lengths shown, consult Synventive for custom lengths.


One control area (thermocouple)			Two control areas (thermocouple)					
LSB (mm)		Heater zone power (Watt)	LSB (mm)		Heater zone power ¹⁾ (Watt)		Adapter Head	Head Bottom
Standard lengths	Custom lengths	Power1	Standard lengths	Custom lengths	Power 1	Power 2	Power	Power
50	>50-<60	150 W	-	=>160-<170	150 W	130 W	450 W	500 W
60	>60-<70	180 W	170	>170-<180	150 W	140 W	450 W	500 W
70	>70-<80	210 W	-	=>180-<190	150 W	150 W	450 W	500 W
80	>80-<90	215 W	190	>190-<200	150 W	160 W	450 W	500 W
90	>90-<100	220 W	-	=>200-<210	150 W	170 W	450 W	500 W
100	>100-<110	225 W	210	>210-<220	150 W	180 W	450 W	500 W
110	>110-<120	230 W	-	=>220-<230	150 W	190 W	450 W	500 W
120	>120-<130	235 W	230	>230-<240	150 W	200 W	450 W	500 W
130	>130-<140	250 W	-	=>240-<250	150 W	210 W	450 W	500 W
-	=>140-<150	255 W	250	>250-<260	150 W	220 W	450 W	500 W
150	>150-<160	260 W	-	=>260-<270	150 W	230 W	450 W	500 W
			270	>270-<280	150 W	240 W	450 W	500 W
			-	=>280-<290	150 W	250 W	450 W	500 W
			290	>290-<300	150 W	260 W	450 W	500 W
			-	=>300-<310	150 W	270 W	450 W	500 W
			310	>310-<320	150 W	280 W	450 W	500 W
			-	=>320-<330	150 W	290 W	450 W	500 W
			330	>330-<340	150 W	300 W	450 W	500 W
			-	=>340-<350	150 W	310 W	450 W	500 W
			350	>350-<360	150 W	320 W	450 W	500 W
			-	=>360-<370	150 W	330 W	450 W	500 W
			370	>370-<380	150 W	340 W	450 W	500 W
			-	=>380-<390	150 W	350 W	450 W	500 W
			390	-	150 W	360 W	450 W	500 W

³⁾ The numbering of the heating zones starts at the nozzle tip and ends at the nozzle head

**CU07SVP01 mounted on
Single Axis Valve Gate
Nozzle 09SVP-03****CU07SVP01 Technical
Data**


Medium	Cooling water
Flow rate	4 l/min
Pressure	max. 8 bar (116 psi)
Temperature	30...60 °C (86 - 140 °F)
Connections	M14x1.5

Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

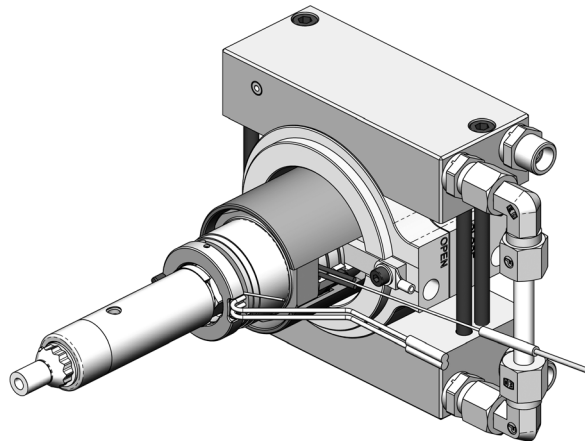
**Parts List**

Pos.	Qty.	Description/ Part Number
01	2	Cooling Sleeve / CU07SVPCS01
02	1	Connecting Tube / CU07SVPCT01
03	2	Sealing Plug / Z942/6
04	4	Straight Coupling / GE08LMEDVITOMDCF
05	2	Elbow Coupling / EW08LVITOMDCF
06	2	Cutting Ring / PSR08LX
07	2	Nut / M08LCFX
08	3	Hexagon Socket Cap Screw / DIN912-M6x95-12.9

Doc009128_RIS.png

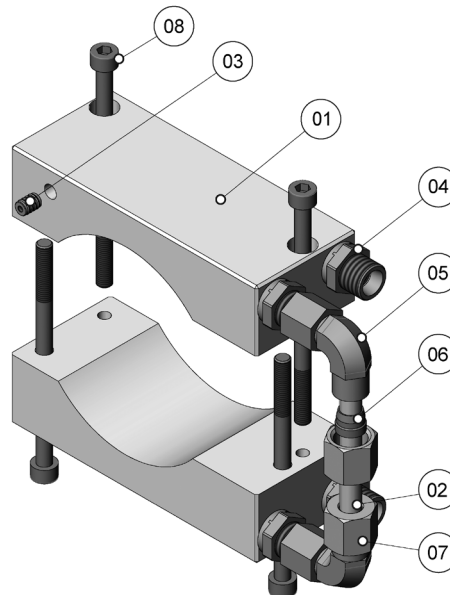**Position of the cooling unit on
the Single Axis Valve Gate
Nozzle 09SVP-03**


Doc005051.png

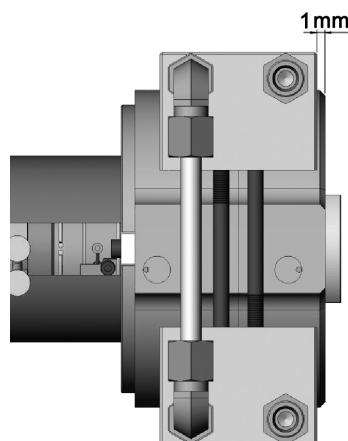

Doc005052.png



Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

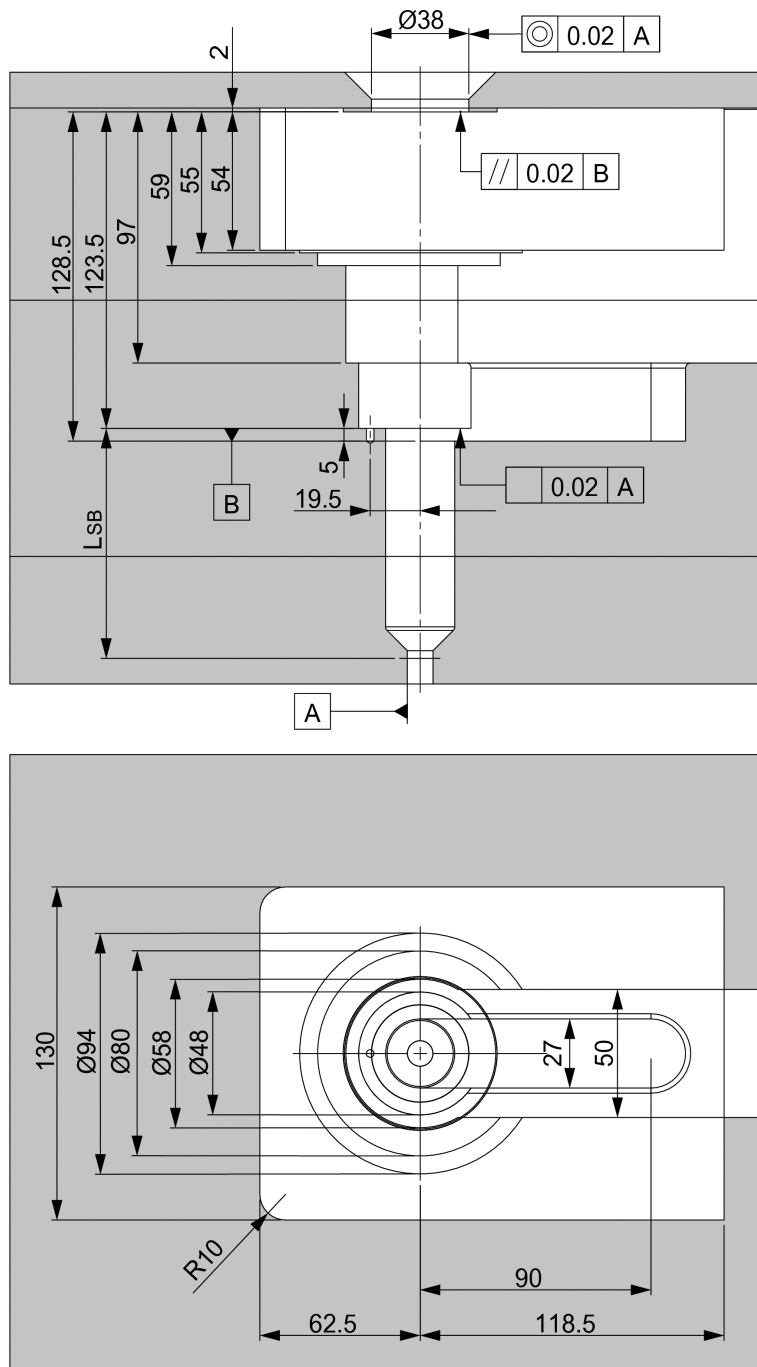

General tolerances: DIN ISO 2768-mK

Doc007388.png



Surfaces: $\sqrt{Ra\ 3.2}$ ($\sqrt{Ra\ 1.6}$ $\sqrt{Ra\ 0.8}$)

Values of the dimension LSB can be found in the data sheet on page 3.




Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.
H = Gate orifice diameter, F = Tip extension, Dt = Tip Diameter, Mod = Modifiable

VSP Valve Gate - Straight Pin - Plunged Through

Tip Style		Description	Application range	Dt = Ø10 F = 0, 10, Mod H=2.5	
	VSP Doc009082_RIS.png	Universal	for all common plastics	✓	
		Seal cap	for color change	✓	

VSW Valve Gate - Straight Pin - Blind

Tip Style		Description	Application range	Dt = Ø14			
				H=1.5	H=2.0	H=2.5	H=3.0
	VSW Doc009084_RIS.png	Universal	for all common plastics		✓		
		Seal cap	for color change		✓		

✓ Preferred

(✓) Available


✗ Not Available



Illustrations simplified, schematically drawn and not to scale. All dimensions in mm.

Dimensions for reference only. Reference system drawing for complete dimensions prior to machining gate detail in mold.

VSW - Nozzle tip cutout dimensions

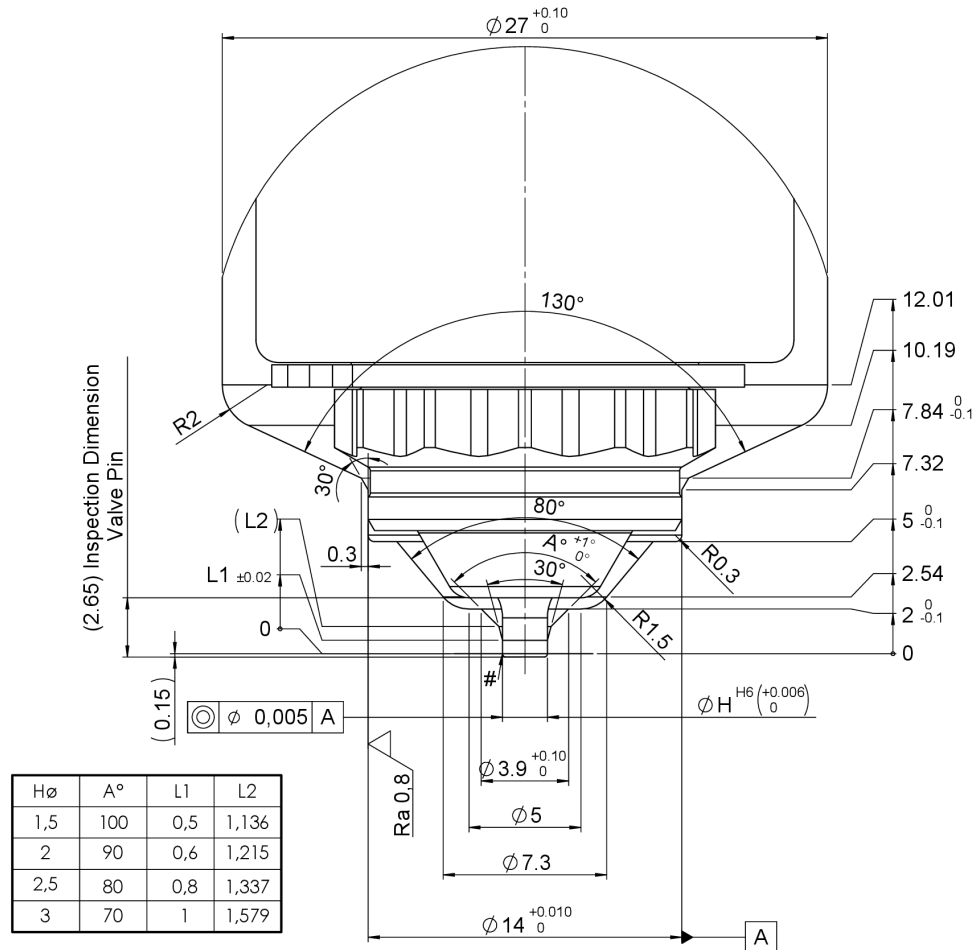

Doc009118_RIS.png

Notes:

- Cooling required around the nozzle tip, opposite to the nozzle tip
- The front of the nozzle tip must always be against plastic.

General tolerances according to DIN ISO 2768-mK

- At the area of the nozzle gate replaceable, hardened (52 +2/-1 HRC) inserts are recommended by Synventive.
- Radius / chamfer at the front of the valve pin shall not be removed.
- Synventive recommends that the gate area geometry is manufactured by grinding and not EDM with a surface quality of $\sqrt{Ra 0.8}$.
- To avoid a deformation at the gate the space to move freely has to be checked at hot condition.
- For angled surface the valve pin may not be adjusted toward cavity.
- Ensure 0.5 mm sealing surface is maintained.



BARNES™
MOLDING SOLUTIONS



Barnes Molding Solutions is the expert cluster for molds, hot runners, and controls for industrial plastic injection molding. Our brands Foboha, Männer, Synventive, Thermoplay, Priamus and Gammaflux are leaders in their field. We have a comprehensive and in-depth understanding of the automotive, medical, packaging and electronics industries. We support our customers with sophisticated high-performance technologies through to customized turnkey solutions.



barnesmoldingsolutions.com

Synventive®
molding solutions

THERMOPLAY®
HotRunnerSystems

männer®
SOLUTIONS FOR PLASTICS

FOBOHA®

PRIAMUS®

Gammaflux®